Banquet Coffee Brewer and Holder





Digitally Controlled Coffee Temperature Brews Up To 9.0 Gallons on Each Side Auto/Manual Coffee Agitation

Dual Wall Insulation

Automatic Refill

Closed Brewing System

Half/Full Batch

Programmable Custom Volumes

Coffee Fresh Indicator

Hot Water Faucet



Features - Banquet Holder

Closed Holding System
Holds Coffee at 180°F-190°F
40 Gallon Capacity
Overhead Flexible Rinse Hose

Accessories - Sold Separately



WC-1019 Jug filler



TXSG0301S200 3.0 Gallon dispenser




OMSCP Cart with pneumatic wheels




OMSCR Cart with rubber wheels



Banquet Coffee Brewer and Holder

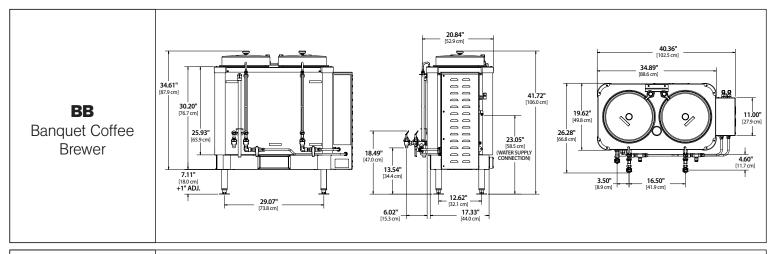

BHK 40.0 Gallon Banquet Coffee Holder

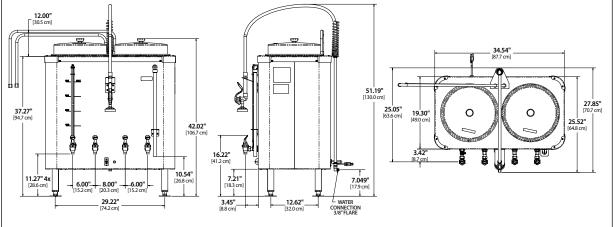

Specifications

MODEL#	DESCRIPTION	BREW CAPACITY	HEIGHT x WIDTH x DEPTH	SHIP WEIGHT	SHIP CUBE	
ВВ	Banquet Coffee Brewer	18.0 Gallons	41.72" x 40.36" x 26.28"	245.0 lbs.	50.0 cu. ft.	
ВНК	Banquet Coffee Holder	NA	51.19" x 34.54" x 27.85"	206.0 lbs.	50.0 cu. ft.	

Utility Requirements

ELECTRICAL							WATER						
MODEL #	PHASE	VOLTS	AMPS	MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	GAL/HR	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
	3 PH	208V	37.3A	50A	3 x 5000W	3W+G	13400W	50/60 Hz	30.0	3/8" Flare	20 - 90 psi	3.0 GPM	33.0 gal.
BB		220V	39.4A	50A	3 x 5000W	3W+G	15000W	50/60 Hz	30.0	3/8" Flare	20 - 90 psi	3.0 GPM	33.0 gal.
DD		230V	41.2A	50A	3 x 5000W	3W+G	16396W	50/60 Hz	30.0	3/8" Flare	20 - 90 psi	3.0 GPM	33.0 gal.
		240V	43.0A	50A	3 x 5000W	3W+G	17800W	50/60 Hz	30.0	3/8" Flare	20 - 90 psi	3.0 GPM	33.0 gal.
ВНК	1 PH	120V	14.2A	15A	2 x 850W	2W+G	1700W	50/60 Hz	NA	3/8" Flare	20 - 60 psi	0.5 GPM	40.0 gal.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

